



Philips Signage Solutions  
Multi-Touch Display

86"

4K UHD (3840 x 2160)

**Signage**Solutions

86BDL3012T

## Engage them

20-point Multi-Touch display.

Inspire collaboration. Deliver information. This responsive Philips Multi-Touch Professional UHD Display is ideal for multi-finger, multi-user applications—from wayfinding to presentations. Up to 20 touch points can be active at once.

### **Superb picture. Responsive touchscreen.**

- 4K UHD. Rich, deep images. Stunning contrast
- Plug-and-play 20-point Multi-Touch display

### **Effortless setup. Total control.**

- CMND & Control. Operate, update, maintain
- Add Android processing power with an optional CRD50 module

### **Versatile system solution**

- Energy-saving automatic backlight control
- QuadViewer. Play four source signals on one screen.
- OPS slot. Embed a full-power PC. No cabling required
- FailOver. Ensure your display never goes blank

# PHILIPS

# Highlights

## CMND & Control



Run your display network over a local (LAN) connection. CMND & Control allows you to perform vital functions like controlling inputs and monitoring display status. Whether you're in charge of one screen or 100.


## QuadViewer



Turn a single Philips Professional Display into a bezel-free 2x2 videowall. By connecting four independent sources, you can effortlessly play multiple channels at once. Simply tell the display which zone should play which content. Ideal for situations like broadcast control


rooms, where feeds from multiple cameras need to be clearly visible.

## OPS slot



Integrate a full-power PC or Android-powered CRD50 module directly into your Philips Professional Display. The OPS slot contains all the connections you need to run your slot-in solution, including a power supply.

## FailOver



From waiting room to meeting room, never show a blank screen. FailOver lets your Philips

Professional Display switch automatically between primary and secondary inputs ensuring content keeps playing even if the primary source goes down. Simply set a list of alternate inputs to be sure your business is always on.

## Optional CRD50 module

Embed an Android System-on-Chip (SoC) in your Philips Professional Display. The optional CRD50 module is an OPS device that enables Android processing power without the need for cables. Simply slide into the OPS slot, which contains all the connections needed to run the module (including power supply).

# Specifications

## Picture/Display

- Diagonal screen size: 85.6 inch / 217.4 cm
- Panel resolution: 3840 x 2160
- Optimum resolution: 3840x 2160 @ 60Hz
- Brightness: 410 cd/m<sup>2</sup>
- Contrast ratio (typical): 1200:1
- Dynamic contrast ratio: 500,000:1
- Aspect ratio: 16:9
- Response time (typical): 8 ms
- Pixel pitch: 0.4935x0.4935 mm
- Display colors: 1.07 billion
- Viewing angle (H / V): 178 / 178 degree
- Picture enhancement: 3/2 - 2/2 motion pull down, 3D Combfilter, Motion compens. deinterlacing, 3D MA deinterlacing, Dynamic contrast enhancement, Progressive scan

## Connectivity

- Video input: DisplayPort (1.2), DVI-D, HDMI (x3), VGA (Analog D-Sub), Component (RCA)
- Video output: DisplayPort
- Audio input: 3.5 mm jack, Audio Left/Right (RCA)
- Audio output: 3.5mm jack, External speaker connector, SPDIF
- Other connections: micro USB, OPS
- External control: RJ45, RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack

## Supported Display Resolution

### Computer formats

Resolution	Refresh rate
1024 x 768	43, 60,70,75Hz
1152 x 864	60, 70, 75Hz
1152 x 870	75Hz
1152 x 900	66,76Hz
1280 x 1024	60,67,71,75,76Hz
1280 x 720	60,70Hz
1280 x 768	60Hz, 75Hz
1280 x 800	60,75Hz
1280 x 960	60,75Hz
1360 x 768	60Hz
1366 x 768	60Hz
1400 x 1050	60, 75Hz
1400 x 1050	60Hz
1440 x 1050	60Hz
1440 x 900	60, 75Hz
1600 x 1200	60Hz
1600 x 900	60Hz
1680 x 1050	60Hz

1920 x 1080	60Hz
1920 x 1200	60Hz
640 x 350	70Hz
640 x 480	60, 67, 72, 75Hz
720 x 400	70Hz
800 x 600	56, 60, 72, 75Hz
832 x 624	75Hz
848 x 480	60Hz
960 x 720	60,75Hz
• UHD Formats: 3840 x 2160, 24, 25, 30, 60 Hz, 4096 x 2160, 24 Hz	
• Video formats	
Resolution	Refresh rate
1080i	50Hz
1080p	60Hz
480i	60Hz
480p	60Hz
4K x 2K	
576i	50Hz
576p	50Hz
720p	60Hz

## Dimensions

- Set dimensions (W x H x D): 1957 x 1128 x 98.4 mm
- Set dimensions in inch (W x H x D): 77.04 x 44.40 x 3.87 inch
- Bezel width: 28.4mm(T/L/R/B)
- Product weight (lb): TBD lb
- Product weight: TBD kg
- VESA Mount: 600(H)x400(V) mm, M8
- Smart Insert mount: 100 x 200 mm

## Convenience

- Placement: Landscape
- Tiled Matrix: Up to 15 x 15
- Keyboard control: Hidden, Lockable
- Signal Loop Through: RS232, IR Loophrough
- Network controllable: RJ45, RS232
- Energy saving functions: Smart Power
- Screen saving functions: Low Bright
- Ease of installation: Smart Insert
- Picture in picture: PIP

## Power

- Standby power consumption: <0.5 W
- Mains power: 100 - 240V~, 50 - 60Hz, 7.5A
- Consumption (Typical): 317 W
- consumption(Max): 471 W

## Operating conditions

- Temperature range (operation): 0 ~ 40 °C
- Temperature range (storage): -20 ~ 60 °C
- Relative humidity: 20 ~ 80 %
- Altitude: 0 ~ 3000 m
- MTBF: 50,000 hour(s)

## Sound

- Built-in speakers: 2 x 10W RMS

## Accessories


- Included accessories: Remote Control, Batteries for remote control, Quick start guide, RS232 cable, AC Power Cord, HDMI cable, IR sensor cable (1.8M), USB cable
- Included Accessories: RS232 daisy-chain cable

## Multimedia Applications

- USB Playback Audio: AAC, AIF, AIFF, ASF, M3U, M4A, MP3, MP4, PLS, WAV, WMA
- USB Playback Video: ISM, M2TS, M4V, Manifest, MK3D, MKV, MP4, MPD, MPEG, MPG, MT2, MTS, TS, VOB
- USB Playback Picture: BMP, GIF, JPEG, PNG

## Miscellaneous

- On-Screen Display Languages: English, French, German, Spanish, Polish, Turkish, Russian, Italian, Simplified Chinese, Traditional Chinese, Arabic, Japanese, Danish, Dutch, Finnish, Norwegian, Portuguese, Swedish
- Regulatory approvals: CE, UL/cUL, CCC, RoHS, BSMI, CB, VCCI, EAC, FCC, Class B, PSB
- Warranty: 3 year warranty

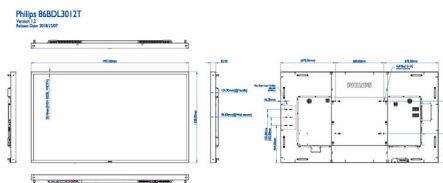

Issue date 2019-03-22

Version: 5.0.1

12 NC: 8670 001 56856  
EAN: 87 12581 75440 2

© 2019 Koninklijke Philips N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips N.V.  
or their respective owners.

www.philips.com