


# FlexScan EV3895

## Say Goodbye to Tired Eyes

The EV3895 is equipped with functions to keep users' eyes comfortable throughout the day.

- Auto brightness control
- 80% blue light reduction
- Flicker-free viewing

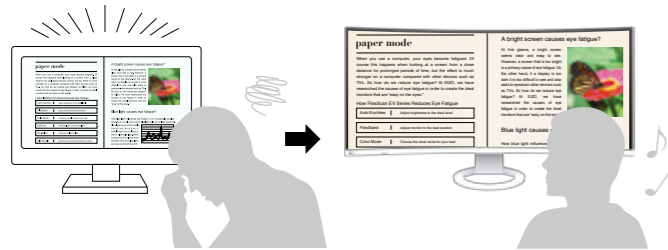

## Commitment to Quality

EIZO manufactures its products in-house to allow close control over production quality and ensure each monitor is built to last.

- 6-month zero bright pixel guarantee
- 5-year warranty
- In-house development, manufacturing, and quality-testing



## Care for the Environment

EIZO is working towards creating environmentally friendly products through a wide range of corporate efforts.

- Energy-saving and power reduction functions
- Major sustainability standards
- SDG contributions




## Specifications

Model Variations	with stand black / white	EV3895-BK / EV3895-WT
	without stand black / white	EV3895-FBK / EV3895-FWT
Panel	Type / Backlight	IPS / LED
	Size	37.5" / 95.3 cm
	Native Resolution	3840 x 1600 (24:10 aspect ratio)
	Viewable Image Size (H x V)	879.7 x 366.5 mm
	Pixel Pitch / Pixel Density	0.229 x 0.229 mm / 111 ppi
	Display Colors	16.77 million
	Viewing Angles (H / V, typical)	178° / 178°
	Brightness / Contrast Ratio (typical)	300 cd/m <sup>2</sup> / 1000:1
Video Signals	Input Terminals	USB Type-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 2.2 / 1.4) x 2
	Output Terminals	-
USB	Digital Scanning Frequency (H / V)	USB Type-C: 31 - 99 kHz / 29 - 31 Hz, 59 - 61 Hz DisplayPort: 31 - 99 kHz / 29 - 31 Hz, 59 - 61 Hz HDMI: 31 - 99 kHz / 29 - 31 Hz, 49 - 51 Hz, 59 - 61 Hz
	Upstream	USB 3.1 Gen 1: Type-B x 2, USB 3.1 Gen 1: Type-C (DisplayPort Alt Mode, Power Delivery Source 85 W max.)
	Downstream	USB 3.1 Gen 1: Type-A x 4
Audio	Speakers / Output Terminals	1.0 W + 1.0 W / Headphones (stereo mini jack)
	Power	Power Requirements AC 100 - 240 V, 50 / 60 Hz Power Consumption Typical / Maximum / Power Save Mode 28 W / 194 W / 0.5 W or less
Features & Functions	Preset Modes	User1, User2, sRGB, Paper, Movie, DICOM
	Auto EcoView	Yes
Physical Specifications	Net Weight	13.2 kg / 9.5 kg (Without Stand)
	Height Adjustment Range / Tilt / Swivel	192.7 mm / 35° Up, 5° Down / 70°
	Hole Spacing (VESA Standard)	100 x 100 mm
Environmental Requirements	Operating Temperature	5 - 35 °C
	Operating Humidity (R.H., non condensing)	20 - 80 %
Certifications & Standards (Please contact EIZO for the latest information.)		TCO Certified Generation 8, EPEAT 2018 (US), TÜV/ Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, China Energy Label Grade2, EAC
Dedicated Software	Monitor Control Utility	Screen InStyle Supported
Supplied Accessories (May vary by country. Please contact EIZO for details.)	Signal Cables	USB Type-C (2 m), DisplayPort (2 m), HDMI (2 m)
	Others	AC power cord (2 m), USB Type-A - USB Type-B cable (2 m) x 2, connector cover, VESA mounting screw x 4, setup guide
Warranty		Five Years*

\*Usage time is limited to 30,000 hours. Free from bright sub-pixels for 6 months from the date of purchase.  
With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically.

## Dimensions (Unit : mm)

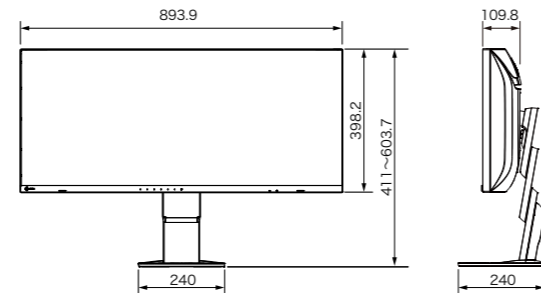

# FlexScan EV3895

37.5" (95.3 cm) LCD Monitor

## Contoured to Your Workstyle



## 37.5-Inch UWQHD+ (3840 x 1600) Ultrawide, Curved Monitor



Visit Our Website  
EIZO's Compatibility Testing Results



## EIZO Corporation

153 Shimokashiwano, Hakusan, Ishikawa 924-8566 Japan  
Phone +81-76-277-6794 Fax +81-76-277-6793  
www.eizoglobal.com



All product names are trademarks or registered trademarks of their respective companies. EIZO, the EIZO logo, and FlexScan are registered trademarks of EIZO Corporation in Japan and other countries. Screen InStyle is a trademark of EIZO Corporation. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries. DICOM is the registered trademark of the National Electrical Manufacturers Association for its standards publications relating to digital communications of medical information. VESA is a registered trademark of Video Electronics Standards Association. USB Type-C, USB-C are registered trademarks of USB Implementers Forum, Inc. iPad, iPhone, macOS Sierra are registered trademarks of Apple Inc. ENERGY STAR is a registered trademark of the United States Environmental Protection Agency in the United States and other countries. Some screen images are used with permission from Microsoft. Specifications are subject to change without notice.



# Contoured to Your Workstyle


**Visualize your Workspace with AR**

Scan the QR code using your iPhone or iPad to see how EIZO fits into your workspace with augmented reality.

## Ultrawide, Curved Monitor

More space and seamless viewing at a comfortable distance.

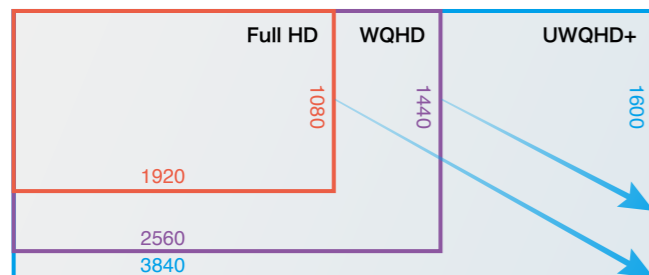


37.5 inches and 3840 x 1600 pixels – nearly triple the pixels to work with compared with Full HD monitors.



Freely arrange multiple applications without the obtrusive bezels typical of multi-monitor setups.

Before

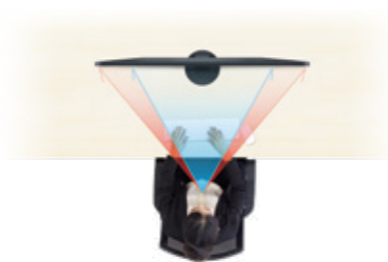

The closer you sit to a large monitor, the greater the distance between your eyes and the edges of the screen.

After



A gentle curve brings edges to a more comfortable distance for improved visibility, focus, and immersion.

## Picture-by-Picture

Operate multiple PCs without switching sources.



Display data from up to three video inputs simultaneously. Easily swap layouts at the touch of a button.

## Aesthetically Pleasing

A natural fit for any work environment.



White or sleek black cabinet color with matching cables. Simple cable management for a clean workspace.

## USB Type-C®


Streamlined connection with a single cable.



A single cable to display video, playback audio, transmit USB signals, supply power to peripherals, and provide network access.

## Connectivity and Flexibility

A wide range of connections within arm's reach.

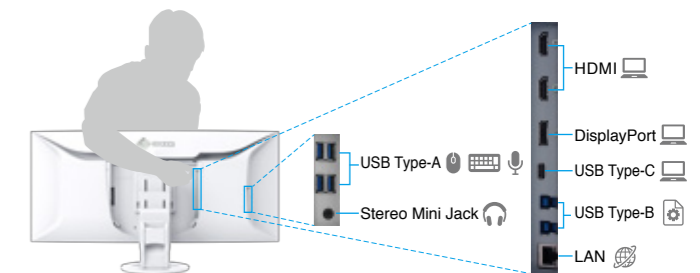

Easily accessible USB Type-C, DisplayPort, HDMI, USB upstream and downstream ports.